


TechnoCrete™LC

Low Viscosity Polymer Repair Mortar

PRODUCT DESCRIPTION

TechnoCrete™LC is a non-shrinkage, self-leveling and no segregating product can be used as a wear surface on interior and elevated exterior areas where worn concrete is an issue. TechnoCrete™LC can be used to repair concrete and reinforced concrete structures by pouring to a thickness of 10 to 100 mm.

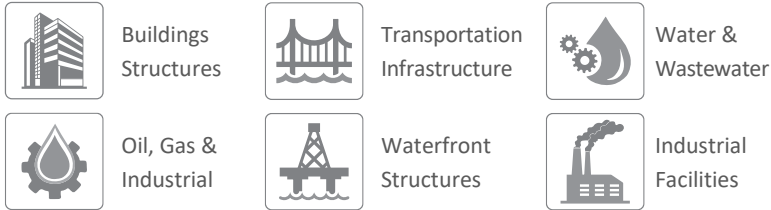

TECHNICAL DATA

	Unit	TechnoCrete™LC
Compressive Strength	Min	MPa
	2 hrs	25
	4 hrs	35
	1 day	45
Tensile Strength		MPa
	2 hrs	3.5
	4 hrs	4.5
	1 day	6
	28 days	9

PHYSICAL PROPERTIES

Maximum size of filler	mm	2.5
Minimum layer thickness	mm	10
Color		Gray

ADVANTAGES

- Easy to mix and install
- Natural-concrete gray in color
- Can be used in exterior non-freeze/thaw areas that are elevated
- Traffic-bearing
- Low shrinkage
- Thixotropic repair mortar
- Fast hardening mortar
- Excellent application properties
- Very good reinforcement protection
- Higher thickness possible

TYPICAL USES

- Interior and exterior use
- Warehouse floors

- As a wear topping on flat concrete roof decks
- Showrooms, lobbies and consistently wet areas
- Grouting of metal construction
- Optimizing traffic management

HANDLING

Approved personal protection equipment should be worn at all times. Particle mask is recommended for possible airborne particles. Gloves are recommended when handling mortar to avoid skin irritation. Safety glasses are recommended to prevent eye irritation. Wear chemical resistant clothing/ gloves/ goggles. Ventilate area. In absence of adequate ventilation, use properly fitted respirator.

INSTALLATION PROCEDURE

PREPARATION OF SUBSTRATE

Thoroughly clean the surface of any substance that could interfere with the bond of the installation material, including dirt, paint, tar, asphalt, wax, oil, grease, latex compounds, sealers, curing compounds, form release agents, laitance, loose toppings, foreign substances and adhesive residue.

Ensure that the substrate and ambient room temperatures are between 4°C and 35°C before application.



Fill deep areas, holes and cracks with appropriate concrete restoration materials.

APPLICATION

Pour the prepared TechnoCrete™LC compound continuously, without vibration. Pouring shall be arranged from one side to prevent air entrapment. Placed mixed ramming is advisable. Surface of the product laid on the horizontal surface maybe smoothed by a grater.

Mixing

- 1- Pour water at the rate of 3.45 liters of water per one 30 kg TechnoCrete™LC bag
- 2- Add TechnoCrete™LC continuously into the mixer.
- 3- Continue mixing for at least 4 minutes.

LIMITATIONS

- Do not add other additives, water or cements to TechnoCrete™LC.
- Do not use solvent-based curing compounds.
- Air, material and substrate temperatures during application must be between 4°C and 35°C.

CAUTION

Cure with wet burlap or polyethylene sheet during the first 4 hours of curing. Alternately, apply a water-based curing compound conforming to ASTM C309.

FAIRST AID

In case of skin contact, wash thoroughly with soap and water. For eye contact, flush immediately with plenty of water; contact physician immediately. For respiratory problems, remove to fresh air. Wash clothing before reuse.

DISCLAIMER: All guidelines, recommendations, statements, and technical data contained herein are based on information and tests we believe to be reliable and correct, but accuracy and completeness of said tests are not guaranteed and are not to be construed as a warranty, either expressed or implied. It is the user's responsibility to satisfy himself, by his own information and test, to determine suitability of the product for his own intended use, application and job situation and user assumes all risk and liability resulting from his use of the product. We do not suggest or guarantee that any hazard listed herein are the only ones which may exist. Neither seller nor manufacturer shall be liable to the buyer or any third person for any injury, loss or damage directly or indirectly resulting from use of, or inability to use, the product. Recommendations or statements, whether in writing or oral, other than those contained herein shall not be binding upon the manufacturer, unless in writing and signed by a corporate officer of the manufacturer. Technical and application information is provided for the purpose of establishing a general profile of the material and proper application procedures. Test performance results were obtained in a controlled environment and Technopol products makes no claim that these tests or any other tests, accurately represent all environments.
